


Brass Quick Coupling Valve, Key

1"

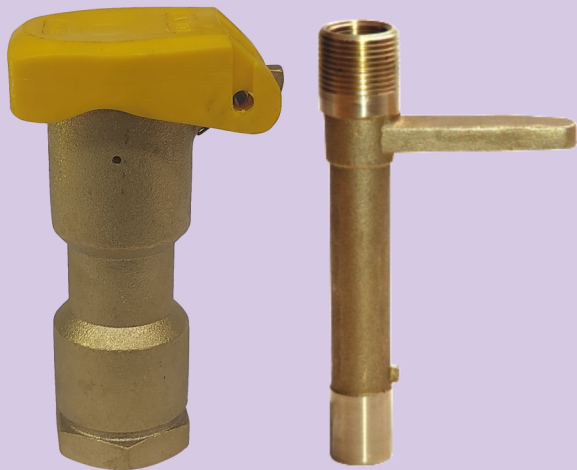

Features

- 1" BSP/NPT Female Threaded Inlet Connection
- Brass body & Key
- One piece body design
- "Sprial Turn and Lock" key with inbuild handle design for gripping
- Strong corrosion-resistant stainless steel spring prevents leakage.
- Yellow thermoplastic cover for durability over years.
- Stainless Steel Spring loaded covers for positive closing
- and protection of valves's sealing components.
- Optional locking cover.

Operating Range

Flow: 4 to 10 m³/h
 Pressure Loss: 0.11 to 0.7 bar
 Operating Pressure Range: 0.25 to 10 bar

Dimensions

Height:
 71B/BL: 17cm
 71B/BL with 71BK Opener: 23.5cm

Models Description

QCV

71B: 1" Brass QCV


71BL: Model 71B with Lockable cover

QCV Key

71BK: 1" Brass QCV Key (Opener for 71B, BL)

1" QCV (71B/71BL)

Flow (m ³ /h)	Pressure Loss (Bars)
4	0.11
5	0.15
6	0.22
7	0.34
8	0.43
9	0.52
10	0.7

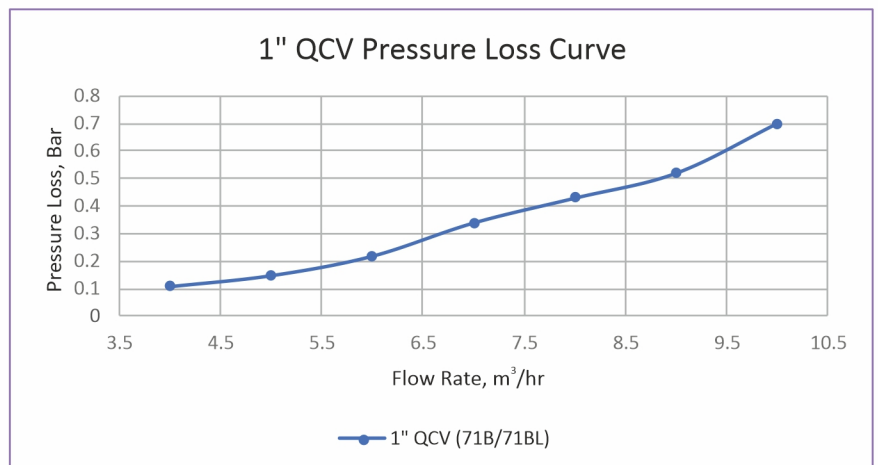

S.No.	Description	Material	Qty
1	Cap	TPR/TPU	1
2	Dowel Pin	Stainless Steel	1
3	Groovemate	EPDM/ NBR	1
4	Nut	Stainless Steel	1
5	Filter/ Valve	Brass	1
6	Spring	Stainless Steel	1
7	Body	Brass/Bronze	1
8	Insert	EPDM+ Brass	1
9	Sealing Washer	NBR	1
10	Bolt	Stainless Steel	1

