

EURO-KEY

Serviceable drippers



FEATURES


- Serviceable dripper to allow easy system monitoring
- Lug-equipped base for dripper line stability
- Compliant with ISO 9261:2004 standard
- Variation Coefficient (VC) ≤5%
- Wide turbulent flow path providing greater resistance to clogging
- Key available (EUDNK00)

SPECIFICATIONS

- Nominal flow rate: 2, 4, 8, 16, 24 l/h
- Recommended operating pressure: 1.0 - 2.0 bar
- VC ≤ 5%
- Inlet: 4 mm barbed coupling
- Male outlet with connection for 4x6 mm microtube

PERFORMANCE

Model	Disc colour	Flow rate @		
		1.0 bar	1.25 bar	1.5 bar
Euro-Key 2 l/h	White	2.0 l/h	2.4 l/h	2.8 l/h
Euro-Key 4 l/h	Black	4.0 l/h	5.0 l/h	5.6 l/h
Euro-Key 8 l/h	Green	8.0 l/h	9.7 l/h	11.2 l/h
Euro-Key 16 l/h	Red	16.0 l/h	16.8 l/h	19.5 l/h
Euro-Key 24 l/h	Yellow	24.7 l/h	29.0 l/h	34.0 l/h

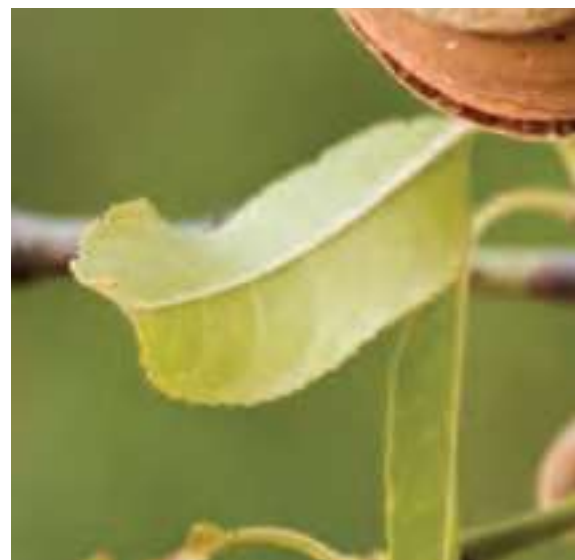

Codification

Code	Description
EU-DNK02-2-BLUE	Euro-Key 2 l/h, dripper with blue base
EU-DNK04-2	Euro-Key 4 l/h, dripper with black base
EU-DNK08-2-RED	Euro-Key 8 l/h, dripper with red base
EU-DNK16-2-MB	Euro-Key 16 l/h, dripper with brown base
EU-DNK24-2-GREEN	Euro-Key 24 l/h, dripper with green base