

# EURO-PLUS

Serviceable Pressure-Compensating Dripper

## APPLICATIONS


Ideal for long sloping lines and where the land is not flat.

## FEATURES

- Serviceable dripper to allow quick and easy maintenance of the system.
- Lug-equipped base to hold the dripper in position along the drip line.
- Silicone membrane.
- 4 mm inlet barbed coupling.
- Male outlet with connection for 4x6mm microtube.

## SPECIFICATIONS

- Nominal flow rate: 4, 8 and 16 l/h.
- Pressure-compensating Range: 1.0-3.0 bar.
- Variation Coefficient (VC) ≤5%.
- Recommended filtration: 150 mesh.
- Compliant with ISO 9261: 2004 standard.

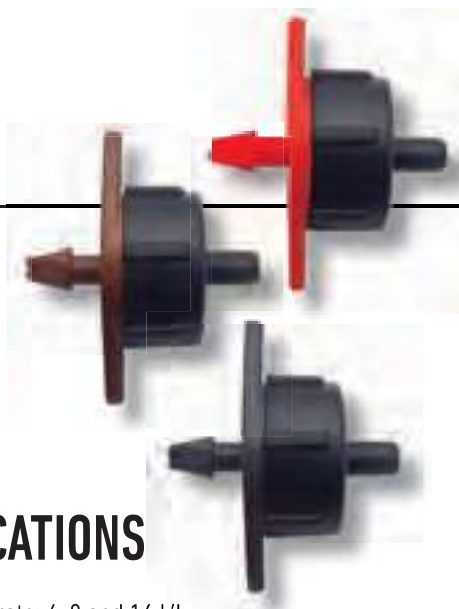

▼ Black Base nominal flow rate 4 l/h



▼ Red Base nominal flow rate 8 l/h



▼ Brown Base nominal flow rate 16 l/h

### PERFORMANCE

Model	Flow rate in l/h @				
	1.0 bar	1.5 bar	2.0 bar	2.5 bar	3.0 bar
IT-DPJ04-2	4.2	4.3	4.6	4.7	4.6
IT-DPJ08-2	8.2	9	9.2	9.1	8.7
IT-DPJ15-2	12.2	14	15.5	16.5	15.5

### Codification

Code	Description
EU-DPJ04-2	Euro-Plus serviceable dripper with nominal flow rate of 4 l/h
EU-DPJ08-2	Euro-Plus serviceable dripper with nominal flow rate of 8 l/h
IT-DPJ15-2	Euro-Plus serviceable dripper with nominal flow rate of 16 l/h